

ATEM Microphone Converter



A\$625

Now it's easy to expand the MADI input on the ATEM Television Studio switchers to add multiple microphones or external audio mixer sources. The ATEM Microphone Converter simply plugs into the ATEM Television Studio MADI port, so there's no complex setup required and additional units can even be daisy chained for more sources. Each converter has 4 analog inputs that are mic/line selectable and have phantom power. The design features amazing audio quality with an extremely low noise floor, a wide dynamic range and very low distortion. The design even uses 8 separate ADCs on each separate input that work together to extend dynamic range! There is also an HDMI monitoring output with scrolling audio waveforms.

Connections

Analog Audio Inputs

4 x Combination 3-pin XLR and TRS / 4 inch Jack switchable between +24dB line and mic level with support for +48V phacntom power.

MADI Inputs

1 x BNC supports 64 channel MADI digital audio

MADI Outputs

1 x BNC supports 64 channel MADI digital audio

HDMI Video Outputs

1 x monitor out.

Computer Interface

1 x USB-C with locking screw

Ethernet

Supports 10/100/1000 BASE-T.



HDMI Output Standards

HD Video Standards

1080p24, 1080p25, 1080p30,
1080p48, 1080p50, 1080p60

HDMI Monitoring

Displays ATEM Microphone Converter name and 4, 8, 12 or 16 audio channels with 60 second waveform history. Also includes individual channel name, VU meters, mic or line level setting and phantom power status.

Audio

ADCs Per Input

8

Noise Floor

-129dBV

Output Sample Depth

24-bit

Digital Preamp

32-bit

Total Harmonic Distortion at full scale

0.002%

Output Sampling Rate

48KHz

Dynamic Range

131dB(A)

MADI Compliance

AES10-2020

Software

Software Control

Mac™ and Windows™ software upgrade via USB or Ethernet.

Internal Software Upgrade

Via downloadable utility application.

Operating Systems



Mac 12.0 Monterey,
Mac 13.0 Ventura or later.



Windows 10, 64-bit.
Windows 11.

Settings Control

Software Settings Control

USB and Ethernet via free software utility.

Hardware Switches

Mini switches for selecting mic or line level and setting +48V phantom power on/off.

Power Requirements

Power Supply

1 x External 12V power supply with locking connector.


Power Consumption

12W max.

Operational Voltage Range

12V to 17.5V DC

Physical Specifications

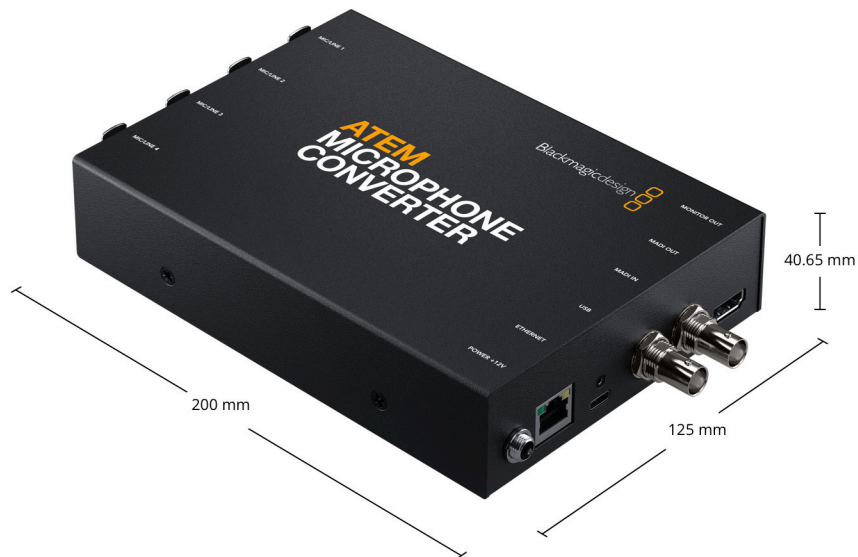

Environmental Specifications

Operating Temperature

0° to 40°C (32° to 104°F)

Storage Temperature

-20° to 60°C (-4° to 140°F)

Relative Humidity

0% to 90% non-condensing

What's Included

ATEM Microphone Converter

External 12V DC power supply with locking connector and international socket adapters for most countries.

Welcome wallet with QR code for software download

Warranty

3 Year Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2023, all rights reserved.
All trademarks are property of their respective owners. MSRP includes GST and excludes shipping costs.
This website uses remarketing services to advertise on third party websites to previous visitors to our site.
You can opt out at any time by changing cookie settings. [Privacy Policy](#)

Blackmagic Design Authorized Reseller