




20A LITHIUM-IRON PHOSPHATE (LFP) BATTERY CHARGER

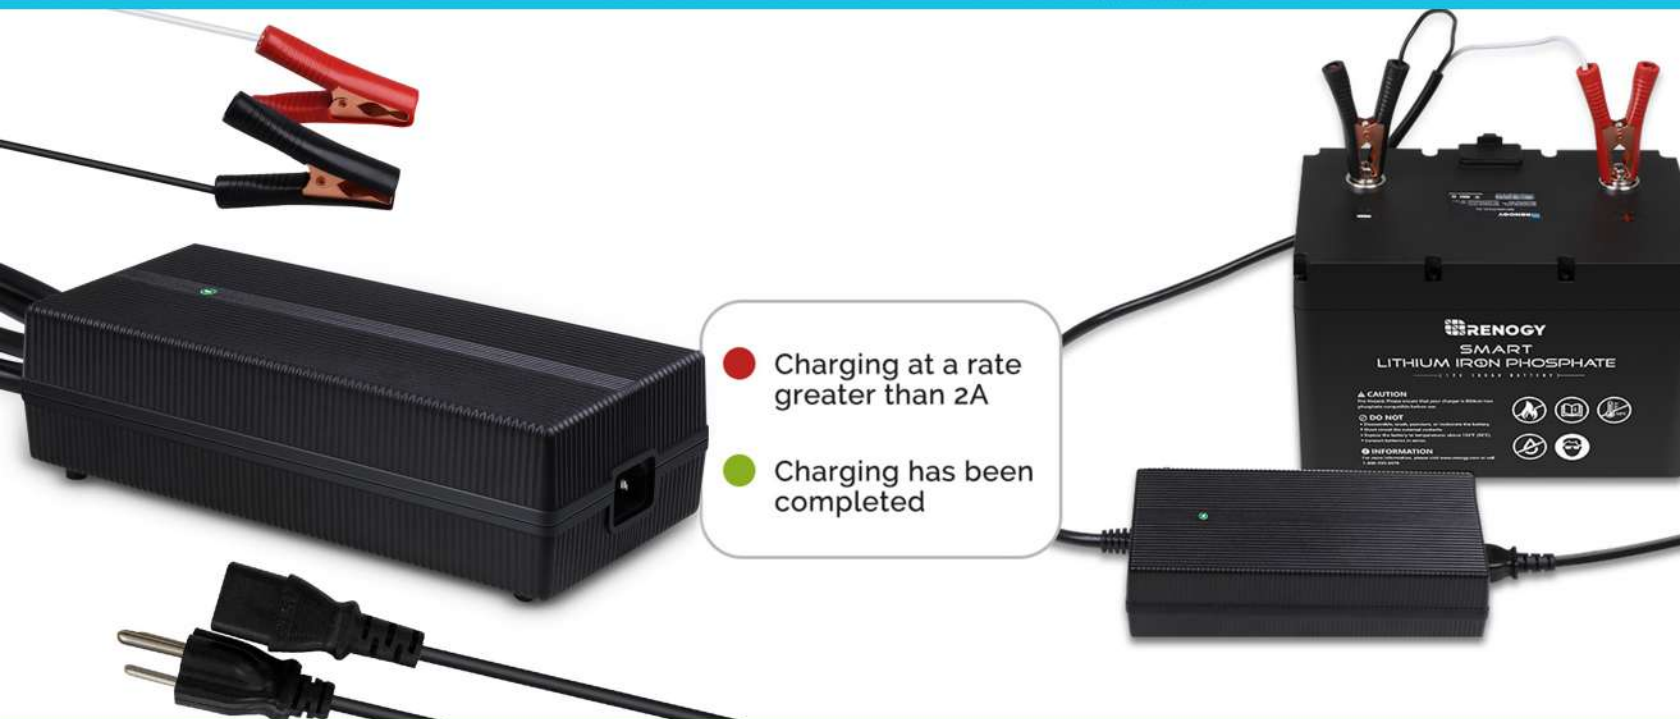

- Charging at a rate greater than 2A
- Charging has been completed

RENOGY 20A LITHIUM-IRON PHOSPHATE (LFP) BATTERY CHARGER

Meet the all-new Renogy 20A Lithium-iron Phosphate (LFP) Portable Battery Charger! Compact yet rugged, the LFP Battery Charger automatically charges and maintains your lithium battery bank granting you peace of mind. An intuitive LED indicator communicates the charge state of the LFP Charger, while the alligator clips make this battery charger a simple plug-and-play. The 20A LFP charger is the perfect companion for your lithium battery setup and works great as your backup charger if needed. The LFP Charger is fully certified for a safety guarantee!

KEY FEATURES

- Automatic LFP Battery Charging with a wide input voltage range
- Easy-to-understand LED indicator for charge status
- Simple Plug-and-Play Technology with Alligator Clips
- Compatible with Renogy 12.8V Lithium Batteries

Specifications

Input Voltage	100-240 VAC ~ 50/60Hz
Input Amps	5A Max
Output Voltage	14.6 VDC
Output Amps	20A
Minimum Battery Voltage	8V
Efficiency	93%
Room Operating Temperature**	-29°C ~ 45°C / -20°F ~ 113°F
Storage Temperature	-40°C ~ 75°C / -40°F ~ 167°F
Self-Consumption	50mA
Current Protection	250V 10A Fuse built in
Dimensions	9.17 x 4.25 x 2.52in / 233 x 108 x64mm
Weight	3.75 lbs / 1.7kgs
Cable Length	Approx 39in / 1000mm
Cable Gauge	12 AWG
Protection	Overcurrent Protection (Fuse 250V 10A) Short Circuit Protection
Certifications	CE, FCC, TUV, ETL

